

MANUFACTURER

ALLGEMEINE BAU - CHEMIE PHIL., INC.
 Address: 10th Floor Asian Star Building, 2404 Asean Drive,
 Filinvest Corporate City, Alabang, Muntinlupa City 1781 Philippines
 Tel: (+63 2) 8426891 ■ Fax: (+63 2) 8427146 ■ info@abc.ph ■ www.abc.ph

PRODUCT NAME


ABC ACRYLIC SEALANT

PRODUCT DESCRIPTION

ABC ACRYLIC SEALANT is a flexible, water based, non-toxic gap filler for indoor and covered outdoor use prior to painting or other finishing work. ABC ACRYLIC SEALANT can be applied on joints to prevent cracks between gypsum board, wood or concrete. It can also be applied between walls, ceilings, corners, door/window frames, walls and along baseboards and cornices.

THE ABC ACRYLIC SEALANT ADVANTAGE

- ✓ 100% acrylic
- ✓ Paintable
- ✓ Non-slumping
- ✓ Low Shrinkage
- ✓ Flexible
- ✓ Good Sanding properties
- ✓ Non-staining
- ✓ Superior adhesion
- ✓ Water based
- ✓ Non-toxic

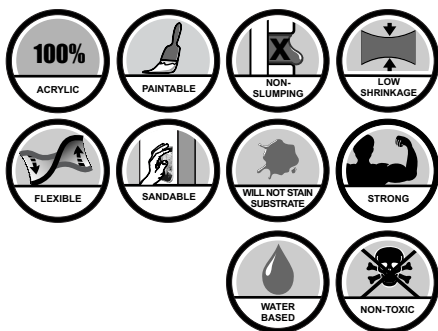


CLASSIFICATION STANDARD

- ✓ ASTM C834 (USA) American Society for Testing & Materials
- ✓ ASTM C920 (USA) American Society for Testing & Materials

TECHNICAL DATA

Solubility in Water	miscible
Viscosity at 23 °C	approx. 600,000 to 700,000 mPa.s
Specific Gravity	1.15
PH	7-8
Appearance / Color	White
Solid Contents	approx. 80%
Density	1.50
Water Resistance	Excellent after 24 hours
Temperature Resistance	- 20°C to 75°C

SECTIONAL DETAIL

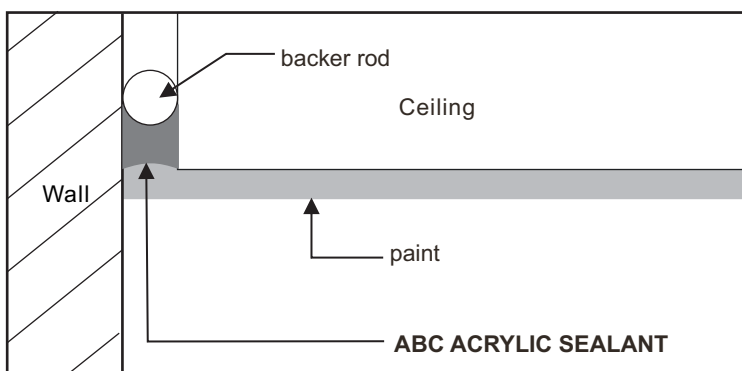

SURFACE PREPARATION

The surface must be fully cured & structurally stable. Make sure the surface is dry, clean and free from contaminants such as dirt, dust, loose material, oils and chemicals.

TIP: Use masking tape for best result and a perfectly straight application line. Apply the tape protecting both sides of the gap to be sealed. Remove the tape before the sealant is dry.

APPLICATION GUIDE

1. Application

a. Use a standard caulking gun to dispense the sealant.

Note: The use of a caulking gun ensures even distribution for a professional finish.





TIP: Hold the sealant gun at an angle of 45° while pulling the gun towards yourself. Find the right working speed to properly fill the necessary gaps.

b. Ensure the sealant is in contact with both sides of joints and gaps. Use foam backer rods to establish good bonding at the sides and to control the depth of the sealant.

2. Finishing

Remove excess sealant and tool with flat knife. Depending on humidity & temperature, applied sealant is touch dry after 30 minutes and can be sanded and painted over after 24 hours. *Note: Protect from water exposure for at least 4 hours after application.*

USES & APPLICATION AREAS

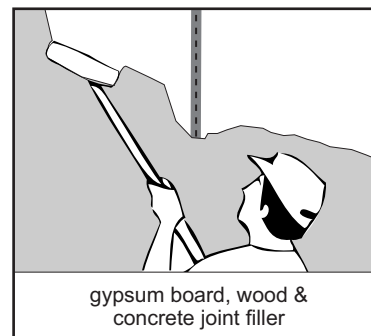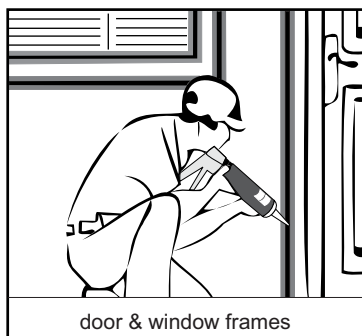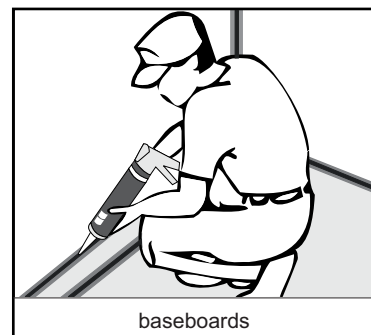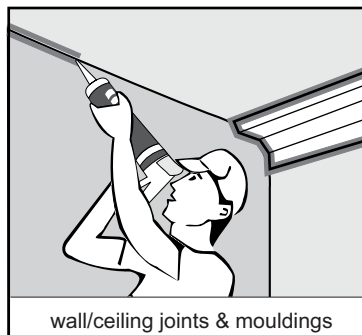

PACKAGING

300ml cartridge

STORAGE & SHELF LIFE

Store in a cool dry place. ABC Acrylic Sealant will remain usable one year from date of manufacture.

WARRANTY

Due to variety of applications, different working methods and the various properties of bases, we cannot assume responsibility or liability with regard to the application of our products. Our guarantee and liability are restricted to the quality of our products at the time of acceptance of the customer of such products. In no case shall our liability extend beyond replacement of defective products, if any, found at the time of acceptance. For all deliveries and services, our General Sales Condition including warranties stipulated for each case are valid.

