

MANUFACTURER

ALLGEMEINE BAU - CHEMIE PHIL., INC.

Address: 10th Floor Asian Star Building, 2404 Asean Drive,
Filinvest Corporate City, Alabang, Muntinlupa City 1781 Philippines
Tel: (+63 2) 8426891 ■ Fax: (+63 2) 8427146 ■ info@abc.ph ■ www.abc.ph**PRODUCT NAME**

ABC GYPSUM COMPOUND

PRODUCT DESCRIPTION

ABC GYPSUM COMPOUND is a multi-purpose joint filler, made of high quality binders and selected non-toxic fillers. It is suitable for a wide range of weather exposed outdoor application areas such as roof eaves, exterior ceiling boards and concrete walls for non-structural filling, leveling and patching to achieve smooth and seamless walls and ceilings. This formulation is weather resistant, easy to use. It is less prone to cracks due to its thick application making it the perfect product to correct indoor and outdoor surface imperfections up to 3 mm before sanding. ABC GYPSUM COMPOUND is ideal for use on large application areas since it is cost-effective and budget-friendly.

 Gypsum Compound is an ABC Eco-friendly product, which have low Volatile Organic Compound (VOC) levels bearing little or no adverse effects to the environment. Its components contain no harmful chemical additives, creating a safe living environment for you and your family.

THE ABC GYPSUM COMPOUND ADVANTAGE

- Smooth Finish
- Excellent Workability
- Crack Resistant
- Good sanding properties
- Non-sagging
- Low Shrinkage
- Paintable
- Outdoor

**CLASSIFICATION STANDARD**

- ASTM C474-05 (USA) American Society for Testing and Materials

TECHNICAL DATA

Solubility in Water	slight (3% maximum)
Specific Gravity	0.99
Appearance / Odor	white, no odor
pH	7-8
Flash point	non-combustible & non-explosive

SURFACE PREPARATION

The surface must be structurally stable, level and dry. Make sure the surface is clean and free from contaminants such as dirt, dust, loose material, oils and chemicals.

APPLICATION GUIDE**1. Mixing**

Gradually pour the powder into a non-absorptive mixing container (plastic pail or galvanized iron) filled with clean tap water. Stir mixture using a spatula and let stand for 5 minutes. Stir again to attain a creamy smooth consistency.

**2. Application**

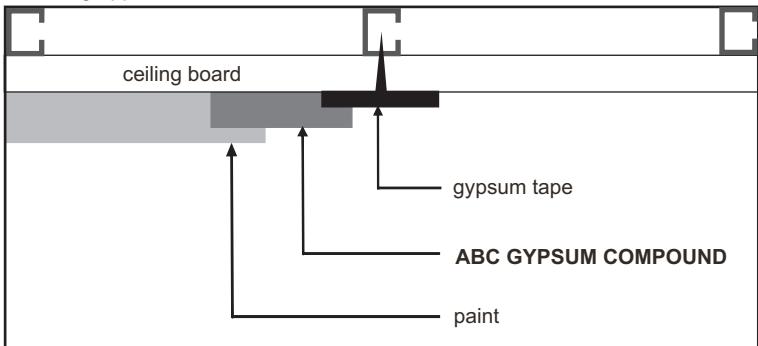
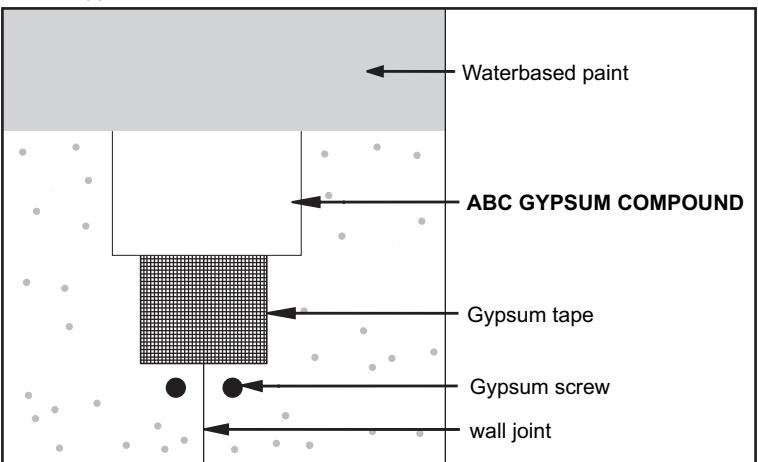
Apply a layer of joint compound to cover the joint and its surrounding edges. Embed a gypsum tape on top of the joint compound and apply another layer once the tape dries. Sand the

POT LIFE
30
minutes

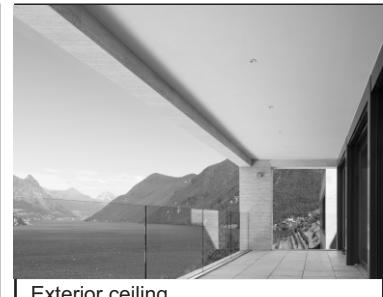
For patching walls use light strokes to cover the holes. Allow each coat to dry completely. Smoothen the final coat by using sand paper prior to finishing.

3. Installation

Follow the paint manufacturer's instruction regarding priming and application of customary or textured paint finishes.

SECTIONAL DETAIL**a. Ceiling application****b. Wall application****APPLICATION AREAS**

Roof eaves



Exterior ceiling

COVERAGE

USE	COVERAGE
Joint Filler	1kg = 4m ² per coat
Leveling compound	1kg = 3 linear meters of tapered joints at 15cm width

PACKAGING

2 kg and 15 kg bag

STORAGE & SHELF LIFE

Store in a cool dry place. ABC Gypsum Compound will remain usable one year from date of manufacture.

WARRANTY

Due to variety of applications, different working methods and the various properties of bases, we cannot assume responsibility or liability with regard to the application of our products. Our guarantee and liability are restricted to the quality of our products at the time of acceptance of the customer of such products. In no case shall our liability extend beyond replacement of defective products, if any, found at the time of acceptance. For all deliveries and services, our General Sales Condition including warranties stipulated for each case are valid.

