

MANUFACTURER

ALLGEMEINE BAU - CHEMIE PHIL., INC.
 Address: 10th Floor Asian Star Building, 2404 Asean Drive,
 Filinvest Corporate City, Alabang, Muntinlupa City 1781 Philippines
 Tel: (+63 2) 8426891 ■ Fax: (+63 2) 8427146 ■ info@abc.ph ■ www.abc.ph

PRODUCT NAME

ABC TILE GROUT

PRODUCT DESCRIPTION

ABC TILE GROUT is a high quality tile joint filler designed for all kinds & sizes of tiles, pavers, synthetic & natural stone. The purpose of a tile joint is to accommodate possible tile movement due to thermal deformation, substrate shrinkage, tile expansion, substrate movement or structural deformation. Having tile joints prevents tiles from debonding, buckling or tenting.

Variants:

ABC TILE GROUT ORIGINAL is used for all tile installations with a tile joint width of 2-6mm.

ABC TILE GROUT with BIO-TECH is an antibacterial, high quality tile joint filler for all tile types and stoneware. **BIO-TECH SYSTEM** is an antibacterial formulation that protects against growth of fungus. It has anti-mold & mildew properties incorporated during the manufacturing process, perfect to prevent the build up of fungi especially on water exposed areas to ensure lasting protection.

ABC SANDED TILE GROUT is ideal for wide gap (7-19mm) pavers, vigan tiles & decorative stone installations to achieve a rustic finish.

THE ABC TILE GROUT ADVANTAGE

Tile Grout Original & Sanded

- ✓ Durable & Crack - free
- ✓ Non-fading & uniform color
- ✓ Professional Finish
- ✓ Eco-friendly

Tile Grout with Bio-Tech

- ✓ Anti - mold & mildew
- ✓ Anti - bacterial
- ✓ Stain Resistant
- ✓ Durable & Crack - free
- ✓ Non-fading & uniform color
- ✓ Professional Finish
- ✓ Eco-friendly



COLORS

Tile Grout with Bio-Tech & Original

- | | |
|-------------------|-------------------|
| - F1 Bahama Beige | - F15 White |
| - F2 Sandel | - F16 Cream |
| - F3 Dark Beige | - F17 Ocher |
| - F4 Mango | - F20 Dark Brown |
| - F5 Olive Green | - F22 Mint Green |
| - F6 Mid Brown | - F23 Peach |
| - F7 Moss Green | - F24 Pink |
| - F10 Carmine Red | - P8 Sorento Blue |
| - F11 Terra Cotta | - P25 Burgundy |
| - F12 Black | - P32 Dark Blue |
| - F13 Anthracite | - P33 Dark Green |
| - F14 Gray | |

Sanded Tile Grout

- F10-S Carmine Red
- F11-S Terra Cotta
- F13-S Anthracite
- F14-S Gray
- F20-S Dark Brown

CLASSIFICATION STANDARD

- ✓ PNS ISO 13007 - 3:2006 Philippine National Standards Int'l Organization for Standardization
- ✓ ASTM C476-09 American Standard of Testing Materials

COVERAGE

2kg TILE GROUT = 8m²

Note: Calculation is based on 30 x 30 cm tiles with 3mm joint width. Coverage is dependent on tile size & thickness, as well as joint width.

SURFACE PREPARATION

Clean tiles & tile joints from excess tile adhesive & other loose material before applying the tile grout. Dampen tile joints with a sponge or brush using clean water only.

APPLICATION GUIDE

1. Mixing

Caution: Use only non-absorptive materials as mixing base (plastic pail or galvanized iron sheets). If absorbent materials such as plywood, wooden box, gypsum board, fiber cement board or cardboard is used, it will affect the chemical properties of the product, which can result in bonding failure and poor product performance.

Use only non-absorptive materials such as plastic pail or galvanized iron sheet. Pour water into the pail & add tile grout powder. Mix to attain lump-free consistency. Let it rest for 15 minutes & restir briefly before use. Use within the 1 hour pot life.

TIP: ABC Tile Grout Waterproofing additive is recommended to safeguard tiled areas that are frequently or permanently immersed in water for lasting protection.

Mixing Ratio

650ml WATER + 2kg TILE GROUT

POT LIFE

1 hour

2. Application

Spread tile grout mortar diagonally using a squeegee. Apply pressure to fill joints uniformly.




TIP: For a long-lasting grout job, make sure all the joints are completely filled with grout. To accomplish this, make several passes over the same area from different directions with the squeegee or grout float.

3. Finishing / Cleaning

After 5 minutes remove haze on tiles with a damp sponge. Let dry. Polish remaining residue with a lint-free cloth to reveal the tile grout color.



SECTIONAL DETAIL

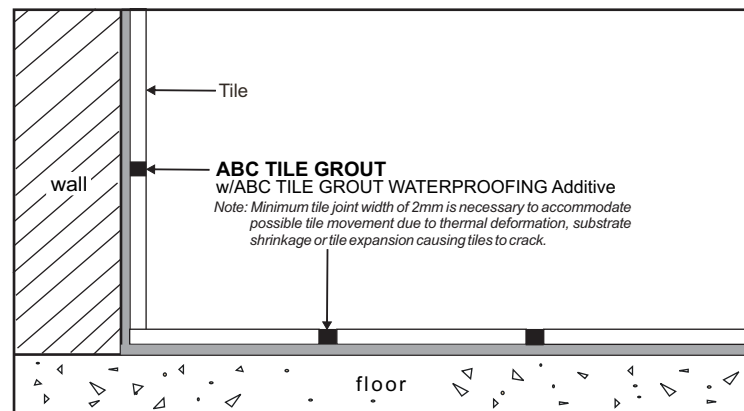

PACKAGING

ABC Tile Grout Original & with Bio-Tech - 2kg bag ■ Sanded Tile Grout - 5kg bag 25kg paperbag available for all variants upon special request.

STORAGE & SHELF LIFE

Store in a cool dry place. ABC Tile Grout will remain usable one year from date of manufacture.

WARRANTY

Due to variety of applications, different working methods and the various properties of bases, we cannot assume responsibility or liability with regard to the application of our products. Our guarantee and liability are restricted to the quality of our products at the time of acceptance of the customer of such products. In no case shall our liability extend beyond replacement of defective products, if any, found at the time of acceptance. For all deliveries and services, our General Sales Condition including warranties stipulated for each case are valid.

