

## COMPANY INFORMATION

ALLGEMEINE BAU - CHEMIE PHIL., INC.  
 Address: 10/F Asian Star Building, 2404 Asean Drive,  
 Filinvest City, Alabang, Muntinlupa City 1781 Philippines  
 Tel: (+63 2) 88426891 ■ Fax: (+63 2) 88427146 ■ info@abc.ph ■ www.abc.ph

## PRODUCT NAME

ABC TILE GROUT

## PRODUCT DESCRIPTION

**ABC TILE GROUT** is a high quality tile joint filler designed for all kinds & sizes of tiles, pavers, synthetic & natural stone. The purpose of a tile joint is to accommodate possible tile movement due to thermal deformation, substrate shrinkage, tile expansion, substrate movement or structural deformation. Having tile joints prevents tiles from debonding, buckling or tenting.

### Variants:

**ABC TILE GROUT ORIGINAL** for all tile installations with a **tile joint width of 2-6mm**.

**ABC TILE GROUT with BIO-TECH** is an antibacterial, high quality tile joint filler for all tile and stoneware with a **tile joint width of 2-6mm**. **BIO-TECH SYSTEM** protects against growth of fungus. It has anti-mold & mildew properties incorporated during the manufacturing process, perfect to prevent the build up of fungi especially on water exposed areas to ensure lasting protection.



**ABC SANDED TILE GROUT** is ideal for pavers, vigan tiles & decorative stone installations that requires **wide tile joint width of 7-19mm** to achieve a rustic finish.



## THE ABC TILE GROUT ADVANTAGE

### Tile Grout Original & Sanded

- ✓ Durable & Crack - free
- ✓ Non-fading & uniform color
- ✓ Professional Finish
- ✓ Eco-friendly & Low VOC Levels

### Tile Grout with Bio-Tech

- ✓ Anti - mold & mildew
- ✓ Anti - bacterial
- ✓ Stain Resistant
- ✓ Durable & Crack - free
- ✓ Non-fading & uniform color
- ✓ Professional Finish
- ✓ Eco-friendly & Low VOC Levels



## COLORS

### Tile Grout with Bio-Tech & Original

F1 Bahama Beige	F15 White
F2 Sandel	F16 Cream
F3 Dark Beige	F17 Ocher
F4 Mango	F20 Dark Brown
F5 Olive Green	F22 Mint Green
F6 Mid Brown	F23 Peach
F7 Moss Green	F24 Pink
F10 Carmine Red	P8 Sorento Blue
F11 Terra Cotta	P25 Burgundy
F12 Black	P32 Dark Blue
F13 Anthracite	P33 Dark Green
F14 Gray	

### Sanded Tile Grout

F10-S Carmine Red
F11-S Terra Cotta
F13-S Anthracite
F14-S Gray
F20-S Dark Brown

## CLASSIFICATION STANDARD

- ✓ PNS ISO 13007 - 3:2014 Philippine National Standards Int'l Organization for Standardization

## COVERAGE

Variant	Tile Size	Joint Width	Approx. Coverage
Tile Grout Original	30 x 30cm	3mm	8m <sup>2</sup>
Bio-Tech Tile Grout	30 x 30cm	3mm	8m <sup>2</sup>
Sanded Tile Grout	10 x 10cm	10mm	2m <sup>2</sup>

Coverage is dependent on tile size, substrate condition and joint width.

## SURFACE PREPARATION

Tiled area must have cured at least 24 hours prior to Tile Grout application. Clean tiles & tile joints from excess tile adhesive & other loose material before applying the tile grout. Dampen tile joints with a sponge or brush using clean water only.

## APPLICATION GUIDE

### 1. Mixing

**Caution: Use only non-absorptive materials as mixing base (plastic pail or G.I. sheet).** If absorptive materials such as plywood, wooden box, gypsum board, fiber cement board or cardboard is used, it will affect the chemical properties of the product, which can result in bonding failure & poor product performance.

In a clean plastic pail, pour water or ABC Tile Grout Waterproofing & add tile grout powder. Mix to attain lump-free consistency. Let it rest for 15 minutes & restir briefly before use. **Observe pot life. NEVER mix different tile grout colors to achieve a different color.**

Pot Life	Mixing Ratio	Time
Tile Grout mixed w/ Water		1 hour
Tile Grout mixed w/ ABC Tile Grout Waterproofing		20 mins.

**TIP:** ABC Tile Grout Waterproofing additive is recommended to safeguard tiled areas that are frequently or permanently immersed in water for

Mixing Ratio	Variant	mixed w/ Water		mixed w/ ABC Tile Grout Waterproofing	
		Weight	Volume	Weight	Volume
	Tile Grout Original	2kg	650ml		750ml
	Bio-Tech Tile Grout	2kg	650ml		750ml
	Sanded Tile Grout	5kg	1000ml		1125ml

### 2. Application

Spread tile grout mortar diagonally using a squeegee. Apply pressure to fill joints uniformly.




**TIP:** For a long-lasting grout job, make sure all the joints are completely filled with grout. To accomplish this, make several passes over the same area from different directions with the squeegee or grout float.

### 3. Finishing / Cleaning

After 5 minutes remove haze on tiles with a damp sponge. Let dry. Polish remaining residue with a lint-free cloth to reveal the tile grout color. Ready for foot traffic after 24 hours.



## SECTIONAL DETAIL

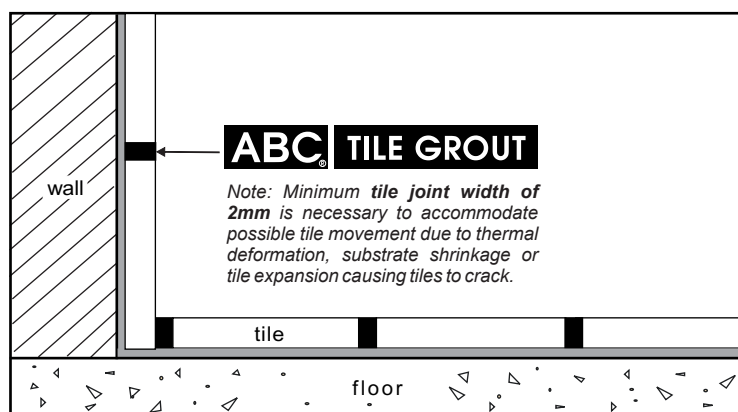

## PACKAGING

- 2 kg plastic bag - ABC Tile Grout Original & Bio-Tech Tile Grout
- 5kg plastic bag - Sanded Tile Grout
- 25kg multilayer paper bag available for all variants upon special request.

## STORAGE & SHELF LIFE

When stored in a cool dry place & in its original unopened packaging, ABC Tile Grout will remain usable 18 months from date of manufacture.

## WARRANTY

Due to variety of applications, different working methods and the various properties of bases, we cannot assume responsibility or liability with regard to the application of our products. Our guarantee and liability are restricted to the quality of our products at the time of acceptance of the customer of such products. In no case shall our liability extend beyond replacement of defective products, if any, found at the time of acceptance. For all deliveries and services, our General Sales Condition including warranties stipulated for each case are valid.