

COMPANY INFORMATION

ALLGEMEINE BAU - CHEMIE PHIL., INC.
 Address: 10/F Asian Star Building, 2404 Asean Drive,
 Filinvest City, Alabang, Muntinlupa City 1781 Philippines
 Tel: (+63 2) 88426891 ■ Fax: (+63 2) 88427146 ■ info@abc.ph ■ www.abc.ph

PRODUCT NAME

ABC SANITARY GRADE SILICONE SEALANT

PRODUCT DESCRIPTION

ABC SILICONE SEALANT SANITARY GRADE is a room temperature vulcanizing (RTV) neutral cure silicone sealant with outstanding adhesive strength. Its formulation with Bio-Tech system makes it resistant to mold and mildew. It is suitable for universal application for various glazing, caulking, grouting or sealing bathrooms and kitchens.

THE ABC SILICONE SEALANT SANITARY GRADE ADVANTAGE

- ✓ Low Modulus
- ✓ Non-slumping
- ✓ Superior adhesion
- ✓ Waterproof
- ✓ Air tight
- ✓ UV & Weather Resistant
- ✓ Permanently Elastic
- ✓ Anti-mold & mildew
- ✓ Anti-bacterial



COLOR

White

CLASSIFICATION STANDARD

- ✓ JIS A 5758 Japan International Standards
- ✓ JIS Z 2911 Japan International Standards

TECHNICAL DATA

TYPICAL UNCURED PROPERTIES

Test Method: JIS A 1439

| PROPERTIES | RESULTS |
|---------------------------|---------|
| Consistency | Paste |
| Specific Gravity (23°C) | 1.03 |
| Extrudability (5°C) sec | 5 |
| Tack-Free Time (23°C) min | 10 |
| Slump | 0 |

TYPICAL CURED PROPERTIES

Test Method: JIS A 1439

| PROPERTIES | RESULTS |
|--|------------|
| 50% Modulus MPa {kgfcm ² } | 0.39 {4.0} |
| Max Tensile Strength MPa {kgfcm ² } | 0.81 {8.3} |
| Elongation % | 170 |


TEST CONDITIONS

Substrate :H-shaped, anodized aluminum
 Primer :TOSPRIME D
 Cure time :14 days at 23°C/50% relative humidity
 :14 days at 30°C/50% relative humidity

SURFACE PREPARATION

The surface must be thoroughly cleaned with a suitable solvent such as alcohol, xylene, or methyl ethyl ketone (MEK). Make sure the surface is dry, clean and free from paint & contaminants such as dirt, dust, loose material, oils & chemicals. For polycarbonate and acrylic resin, n-hexane should be used in order to prevent solvent-cracking.

TIP: Use masking tape for best result and a perfectly straight application line. Apply the tape protecting both sides of the gap to be sealed. Remove the tape before the sealant is dry.

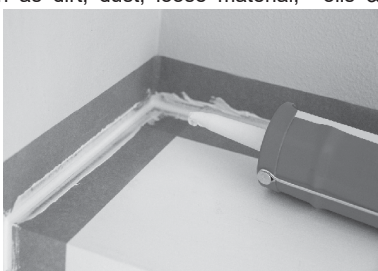

APPLICATION GUIDE

1. Application

- a. Use a standard caulking gun to dispense the sealant. Tool immediately, within 5 minutes of application, with a spatula to spread the sealant against the back-up material and joint surfaces. Sealant will begin to skin on the exposed surface in about 10 minutes and cure will progress inward.

Note: The use of a caulking gun ensures even distribution for a professional finish.

TIP: Hold the sealant gun at an angle of 45° while pulling the gun towards yourself. Find the right working speed to properly fill the necessary gaps.


- b. For areas with deep surfaces: Ensure the sealant is in contact with both sides of joints and gaps. Use foam backer rods to establish good bonding at the sides and to control the depth of the sealant.

2. Finishing

Wet your finger with soapy water to smoothen out the silicone sealant seam. The soap prevents the sealant from sticking to your finger. Remove any excess sealant from surface with knife or spatula. Depending on humidity & temperature, applied sealant is touch dry after approx. 30 minutes.

Note: Protect from water exposure for at least 4 hours after application.

APPLICATION AREAS

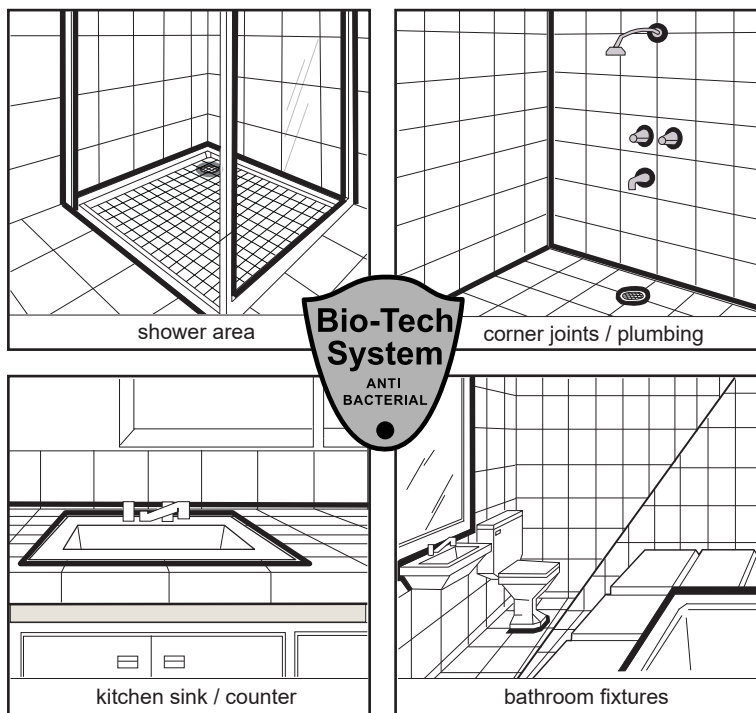

PACKAGING

300ml plastic cartridge

STORAGE & SHELF LIFE

When stored in a cool dry place & in its original unopened packaging, ABC Silicone Sealant Sanitary Grade will remain usable one year from date of manufacture.

WARRANTY

Due to variety of applications, different working methods and the various properties of bases, we cannot assume responsibility or liability with regard to the application of our products. Our guarantee and liability are restricted to the quality of our products at the time of acceptance of the customer of such products. In no case shall our liability extend beyond replacement of defective products, if any, found at the time of acceptance. For all deliveries and services, our General Sales Condition including warranties stipulated for each case are valid.