

COMPANY INFORMATION

ALLGEMEINE BAU - CHEMIE PHIL., INC.
 Address: 10/F Asian Star Building, 2404 Asean Drive,
 Filinvest City, Alabang, Muntinlupa City 1781, Philippines
 Tel: (+63 2) 8426891 ■ Fax: (+63 2) 8427146 ■ info@abc.ph ■ www.abc.ph

PRODUCT NAME

ABC TILE GROUT

PRODUCT DESCRIPTION

ABC TILE GROUT is a high quality tile joint filler for all tile types, stoneware & pavers. It is easy to use and ensures a professional finish. It is recommended for indoor & outdoor use. A tile joint allows possible tile movement during thermal deformation when the concrete substrate contracts and expands, preventing tiles from cracking, warping and debonding.

Variants:

ABC TILE GROUT ORIGINAL for all tile installations with a **tile joint width of 2-6mm**.

ABC TILE GROUT with BIO-TECH is an antibacterial, high quality tile joint filler for all tile and stoneware with a **tile joint width of 2-6mm**. **BIO-TECH SYSTEM** protects against growth of fungus. It has anti-mold & mildew properties incorporated during the manufacturing process, perfect to prevent the build up of fungi especially on water exposed areas to ensure lasting protection.



ABC SANDED TILE GROUT is ideal for pavers, vigan tiles & decorative stone installations that require **wide tile joint width of 7-19mm** to achieve a rustic finish.



THE ABC TILE GROUT ADVANTAGE

Tile Grout Original & Sanded

- ✓ Durable & Crack - free
- ✓ Non-fading & uniform color
- ✓ Professional Finish
- ✓ Eco-friendly & Low VOC Levels

Tile Grout with Bio-Tech

- ✓ Anti - mold & mildew
- ✓ Anti - bacterial
- ✓ Stain Resistant
- ✓ Durable & Crack - free
- ✓ Non-fading & uniform color
- ✓ Professional Finish
- ✓ Eco-friendly & Low VOC Levels



COLORS

Tile Grout with Bio-Tech & Original

F1 Bahama Beige	F17 Ocher
F2 Sandel	F22 Mint Green
F3 Dark Beige	F23 Peach
F4 Mango	F24 Pink
F5 Olive Green	P7 Moss Green
F6 Mid Brown	P8 Sorento Blue
F10 Carmine Red	P12 Black
F11 Terra Cotta	P20 Dark Brown
F13 Anthracite	P25 Burgundy
F14 Gray	P32 Dark Blue
F15 White	P33 Dark Green
F16 Cream	

Sanded Tile Grout

F10-S Carmine Red
F11-S Terra Cotta
F13-S Anthracite
F14-S Gray
F20-S Dark Brown

CLASSIFICATION STANDARD

- ✓ PNS ISO 13007 - 3:2014 Philippine National Standards Int'l Organization for Standardization

COVERAGE

Variant	Tile Size	Joint Width	Approx. Coverage
Tile Grout Original	30 x 30cm	3mm	8m ²
Bio-Tech Tile Grout	30 x 30cm	3mm	8m ²
Sanded Tile Grout	10 x 10cm	10mm	2m ²

Coverage is dependent on tile size, substrate condition and joint width.

SURFACE PREPARATION

Tiled area must have cured at least 24 hours prior to Tile Grout application. Clean tiles & tile joints from excess tile adhesive & other loose material before applying the tile grout. Dampen tile joints with a sponge or brush using clean water only.

APPLICATION GUIDE

1. Mixing

Pour liquid (water or ABC Tile Grout Waterproofing) into a pail & add tile grout. Mix to attain a smooth and lump-free consistency. If water is used, let mix rest for 15 mins, and restir briefly before applying. If ABC Tile Grout Waterproofing is used, apply immediately. Observe pot life.

⚠ Use only non-absorptive materials as mixing base (plastic pail or G.I. sheet). Never mix different tile grout colors to achieve a different color.

Pot Life	Tile Grout mixed w/ water	1 hour
	Tile Grout mixed w/ ABC Tile Grout Waterproofing	20 minutes


💡 TIP: ABC Tile Grout Waterproofing additive is recommended to safeguard tiled areas that are frequently or permanently immersed in water for lasting protection.

Mixing Ratio	Variant		mixed w/ Water	mixed w/ ABC Tile Grout Waterproofing
	Tile Grout Original	2kg	650ml	750ml
Bio-Tech Tile Grout	2kg	650ml	750ml	
Sanded Tile Grout	5kg	1000ml	1125ml	

2. Application

Spread tile grout mortar diagonally using a squeegee. Apply pressure to fill joints completely.

💡 TIP: For a long-lasting grout job, make sure all tile joints are completely filled with grout. To accomplish this make several passes over the same area from different directions with a squeegee or grout float.




3. Finishing / Cleaning

After 5 minutes remove haze on tiles with a damp sponge. Let dry. Polish remaining residue with a lint-free cloth to reveal the tile grout color. Ready for foot traffic after 24 hours.



SECTIONAL DETAIL

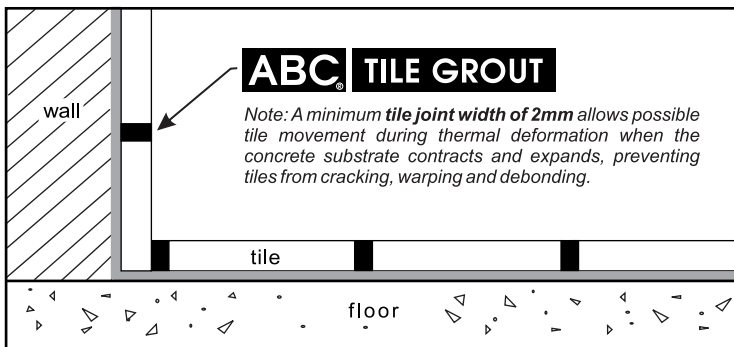

PACKAGING

- **2 kg plastic bag** - ABC Tile Grout Original & Bio-Tech Tile Grout
- **5kg plastic bag** - Sanded Tile Grout
- **25kg multilayer paper bag** available for all variants upon special request.

STORAGE & SHELF LIFE

When stored in a cool dry place & in its original unopened packaging, ABC Tile Grout will remain usable 18 months from date of manufacture.

WARRANTY

Due to variety of applications, differing working methods and the various properties of bases, we cannot assume responsibility or liability with regard to the application of our products. Our guarantee and liability are restricted to the quality of our products at the time of acceptance of the customer of such products. In no case shall our liability extend beyond replacement of defective products, if any, found at the time of acceptance. For all deliveries and services, our General Sales Condition including warranties stipulated for each case are valid.

